

In Multiple Backup WANs for Added Reliability

Built-in dual-cellular modems plus external WAN options ensures unbreakable connectivity while on the go and in the most remote locations.







Ethernet WAN

VΔN LISR WΔI





Simple Installation for Mass Deployments

For truly remote and industrial applications, its built-in eSIM and remote SIM configuration allows for zero-truck-roll provisioning, configuration and management.

Remotely manage and configure all devices in your network with InControl and InTouch. No pre-staging configurations necessary.







Eliminate truck rolls

Central Management

Advanced SpeedFusion Technology

SpeedFusion technology seamlessly bonds multiple Internet connections into a single more-reliable Internet feed to achieve zero interruption.

III Single Cellular





ııl Dual Cellular






(With Bandwidth Bonding & Hot Failover Technology)




III Flexible Power and Port Options

The BR2 supports a fanless design that can be powered in three different ways:

1 Micro-Fit Connector Power Port compatible with standard AC Power Adapter or our Peplink cable adapters for various power sources.



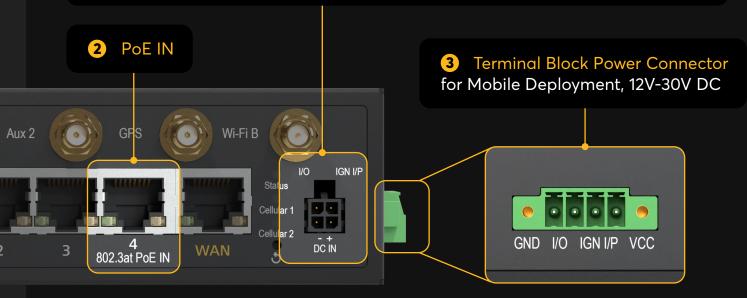


-40°F

Ruggedized Metal Enclosure

that stays operational across a wide temperature range

149°F

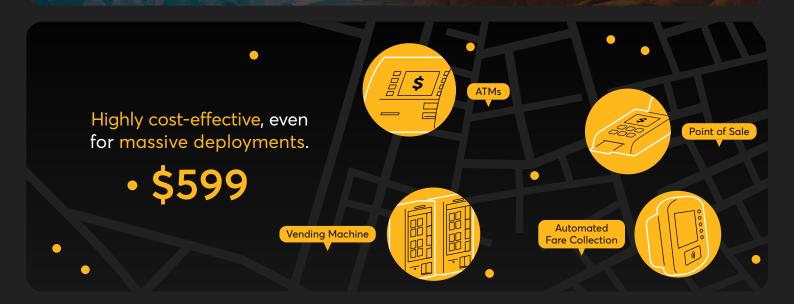







Specifications

WAN Interface 1x 10/100/1000M Ethernet

2x Embedded Cellular Modems with

Redundant SIM Slots 1x USB Interface

LAN Interface 4x 10/100/1000M Ethernet

Wi-Fi Interface Simultaneous Dual-Band (2.4GHz / 5GHz)

> Wi-Fi 5, 2X2 MIMO Wi-Fi WAN and/or AP

Hot Failover 1 / Smoothing 1 / SpeedFusion features

2/51

Bandwidth Bonding 1

Number of

SpeedFusion VPN

Peers

Router Throughput 300Mbps

SpeedFusion VPN Throughput

- No Encryption 80Mbps - 256-bit AES 60Mbps

Recommended Users 1-60

Cellular Data Rate² (Downlink/Uplink)

CAT-4: 150 Mbps / 50 Mbps

4x SMA Cellular Antenna Connectors **Antenna Connectors**

2x RP-SMA Wi-Fi Antenna Connectors 1x SMA GPS Antenna Connector

Power Input Power Port: 12V - 30V DC

AC Adapter: AC Input 100V-240V / DC Output 12V

Terminal Block: 12V - 30V DC Power over Ethernet 802.3at

8W (nominal) / 13W (max. without USB output) **Power Consumption**

6.89 x 5.12 x 1.61 inches / 175mm x 130mm x 41mm Dimension

Weight 2.43 pounds / 1.1 kg

-40° - 149°F / -40° - 65°C **Operating Temperature**

Humidity 15% - 95% (non-condensing)

Certifications FCC, CE, RoHS

EN 61000 Electromagnetic Compatibility

Package Content

4x LTE Antennas (ACW-237) 2x Dual Band Wi-Fi Antennas (ACW-342) 1x GPS Active Antenna (ACW-232)

1x 12V 2A 4pin Power Supply

SIM Options Nano-SIM (4FF)

Peplink eSIM ³

BYO eSIM (2 profiles each modem) ³ RemoteSIM from SIM Injector

FusionSIM

1-Year Limited Warranty Warranty

Specifications are subject to change without notice.

¹ Requires a PrimeCare subscription, complimentary for the first year.

² Maximum theoretical data rate.

³ Models with selected SKU support eSIM. Details can be found <u>here.</u>





Ordering Information

Product Code MAX-BR2-LTE-US-T-PRM Embedded Modem(s): 2x CAT-4	Regions^ North America* *US Carrier Certifications: AT&T, T-Mobile, Verizon, FirstNet	LTE Bands B2, B4, B5, B12, B13, B14, B66, B71	3G Bands B2, B5
MAX-BR2-LTE-E-T-PRM Embedded Modem(s): 2x CAT-4	APAC, EMEA	B1, B3, B5, B7, B8, B20, B38, B40, B41	B1, B5, B8
MAX-BR2-LTE-EJ-T-PRM Embedded Modem(s): 2x CAT-4	Japan	B1, B3, B8, B18, B19, B26, B41	B1,B6, B8, B19
MAX-BR2-LTE-MX-T-PRM Embedded Modem(s): 2x CAT-4	Latin America	B1, B2, B3, B4, B5, B7, B8, B28, B40	B1, B2, B3, B4, B5, B8

 $^{{}^{\}wedge}$ Regions are for reference only. For specific location compatibility, please refer to the bands.

Featured Add-on

Product Code	Description	
PRM-B-1Y / PCP-B-1Y	PrimeCare B / PrimeCare+ B (1-Year)	
PRM-B-2Y / PCP-B-2Y	PrimeCare B / PrimeCare+ B (2-Year)	
PRM-B-4Y / PCP-B-4Y	PrimeCare B / PrimeCare+ B (4-Year)	
ACW-634	10ft / 3m DC Power Cable	
ACW-643	Vehicle Cigarette to Molex Power Cable	
ACW-791	4-Pin Micro-Fit to USB-C Power Cable	
ANT-MB-42G-S-B-6	Mobility 42G - 4x4 MIMO Cellular and Wi-Fi Antenna System with GPS (Black)	
ANT-MB-42G-S-W-6	Mobility 42G - 4x4 MIMO Cellular and Wi-Fi Antenna System with GPS (White)	
ANT-SLM-40G-S-B-6	Slim 40G - 4x4 MIMO Cellular Antenna System with GPS (Black)	