



Semtech Antenna 5-in-1 Flat Panel for XR60

Semtech Antenna – 5-in-1 Flat Panel for XR60


The 5-in-1 Flat Panel antenna solution engineered and certified for AirLink® XR60 fixed/mobility applications.

The antenna features 4x4 MIMO supporting 4G/5G bands covering from 617 - 6000 MHz, along with high-performance GNSS.

		Specification	
PART NO.		6001547 (Black)	
ELECTRICAL DATA Frequency Range	4G/5G Elements	617-6000MHz	
Peak gain: Isotropic*	4G/5G Elements	617-960MHz 1427-6000MHz	4.25dBi 4.08dBi
Isolation*	4G/5G Elements	617-960MHz 1427-6000MHz	≥10dB ≥10dB
Typical Efficiency	4G/5G Elements	617-960MHz 1427-6000MHz	32% 22.6%
Pattern		Omni-directional	
Impedance		50Ω	

^{*}Simulated off a groundplane and does not include cable attenuation

		Specification
GPS/GNSS DATA		
Frequency Range		1559-1612MHz / 1164-1189MHz
Gain: LNA		28dB
Out of Band Rejection		>70dB @ 600-960MHz >65dB @ 1710-3000MHz
Typical Noise Figure		2.8dB
Operating Voltage		1.8 to 5.5V DC
Typical Current		10 ± 3 mA
MECHANICAL DATA		
Dimensions	Height	20 mm
	Length	146.05 mm
	Width	136.05 mm
Operating Temp		-40°C to 85°C
Colour		Black
Ingress Protection		IP67
MOUNTING DATA Mounting Type		Adhesive Mount
EXTENSION CABLE DATA	ı.	
Cellular Cables	Type	TGC-302
	Length	3m (9.84")
	Termination	SMA (M)
GPS Cable	Туре	RG-174
	Length	3m (9.84")
	Termination	SMA (M)
ACCESSORIES		
In The Box		Flat Panel antenna, double sided adhesive foam

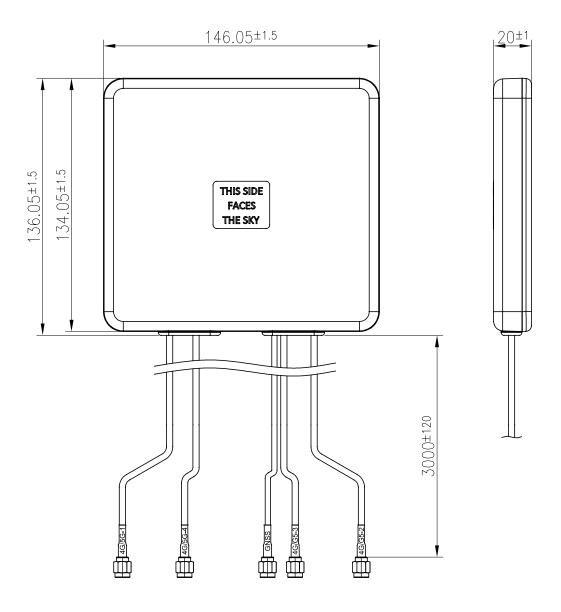

About Semtech

Semtech Corporation (Nasdaq: SMTC) is a high-performance semiconductor, IoT systems and cloud connectivity service provider dedicated to delivering high-quality technology solutions that enable a smarter, more connected and sustainable planet. Our global teams are committed to empowering solution architects and application developers to develop breakthrough products for the infrastructure, industrial and consumer markets.

To learn more about Semtech technology, visit us at Semtech.com or follow us on LinkedIn or X.



